


# evs 30

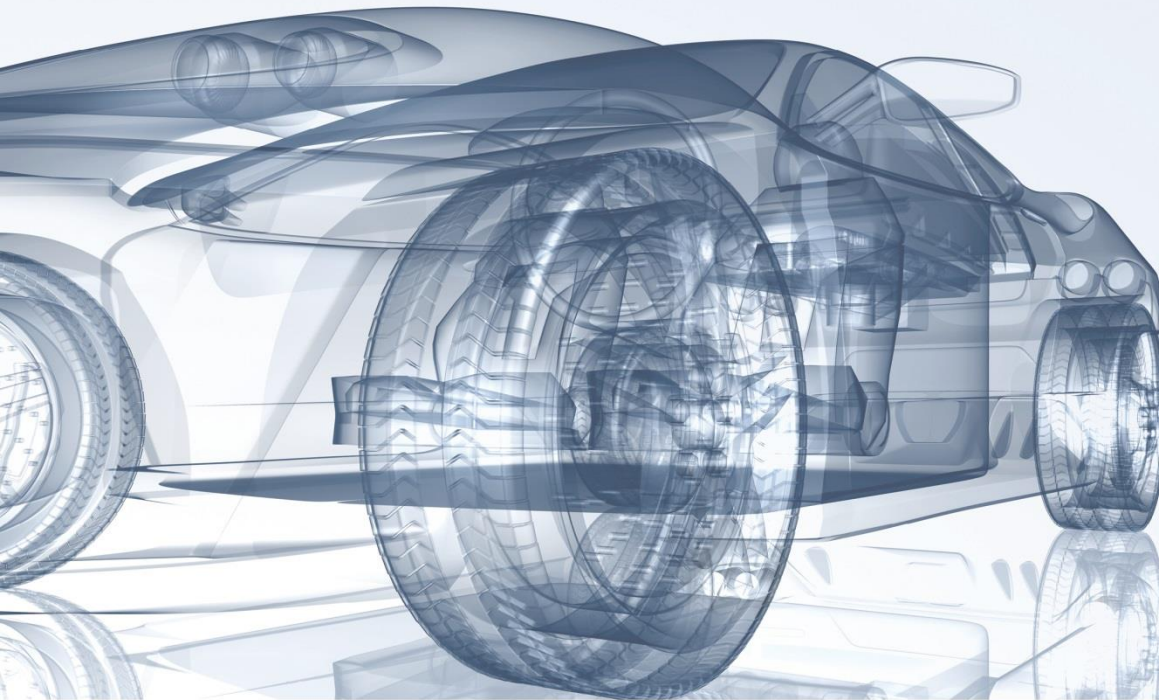

The 30th International  
Electric Vehicle  
Symposium & Exhibition

**October 9–11, 2017**  
Messe Stuttgart, Germany

[www.evs30.org](http://www.evs30.org)

Sponsored by

DAIMLER



**BOSCH**  
Invented for life

**GROUPE RENAULT**

**MAHLE**

— **EnBW**



**swarco**

# The rise of the speed pedelec, restrained by legislation?

Bram Rotthier, Guylian Stevens, Bart Huyck, Emilia Motoasca, Jan Cappelle

*KU Leuven technology campus Ghent*

EVS30 Symposium  
11<sup>th</sup> October 2017

## Maximum assistance factor of four for speed pedelecs?

- Speed pedelec
- European speed pedelec legislation
- Maximum assistance factor
  - ⇔ Vehicle speed
  - ⇔ Testing procedure
  - ⇔ Current speed pedelec assistance factors
  - ⇔ Safety
- Speed pedelecs that do not comply with factor 4?
- Future



- Electric two-wheeler
- Pedal assistance up to 45 km/h
- Typical maximum continuous rated motor power of 350 W or 500 W

### European legislation

*Technical requirements, driver's licences...*

### Local legislation

*Traffic code, education...*



- Electric two-wheeler
- Pedal assistance up to 45 km/h
- Typical maximum continuous rated motor power of 350 W or 500 W

### European legislation

*Technical requirements, driver's licences...*

*€ L1e-B category*

### Local legislation

*Traffic code, education...*

*Belgium: dedicated speed pedelec category*

- Exempt from type approval  
*traditional electric bicycles, vehicles primarily intended for off-road use and designed to travel on unpaved surfaces...*
- L1e: Light two-wheel powered vehicles
  - L1e-A: Powered cycles  
Primary aim to aid pedalling,  $\leq 25$  km/h,  $\leq 1000$  W
  - L1e-B: Two-wheel moped  
 $\leq 45$  km/h,  $\leq 4000$  W
    - Cycles designed to pedal  
→  $\leq 35$  kg, adjustable rider positioning, maximum assistance factor of 4...

- Exempt from type approval  
*traditional electric bicycles, vehicles primarily intended for off-road use and designed to travel on unpaved surfaces...*
- L1e: Light two-wheel powered vehicles
  - L1e-A: Powered cycles  
Primary aim to aid pedalling,  $\leq 25$  km/h,  $\leq 1000$  W
  - L1e-B: Two-wheel moped  
 $\leq 45$  km/h,  $\leq 4000$  W  
• Cycles designed to pedal  
→  $\leq 35$  kg, adjustable rider positioning, maximum assistance factor of 4...

← Speed pedelec


### *RVFSR\*, Annex XIX*

#### *Requirements regarding vehicle structure integrity*


- 1.1.2. *Cycles designed to pedal of vehicle category L1e-B shall have a mass in running order **≤ 35 kg** and shall be fitted with **pedals** enabling the vehicle to be propelled solely by the rider’s muscular leg power. The vehicle shall feature **adjustable rider positioning** in order to enhance the ergonomic posture of the rider for pedalling. The auxiliary propulsion power shall be added to the **driver’s pedal power** and shall be less than or equal to **four times the actual pedal power**.*

*\*COMMISSION DELEGATED REGULATION (EU) No 3/2014*

## Maximum assistance factor (MAF)

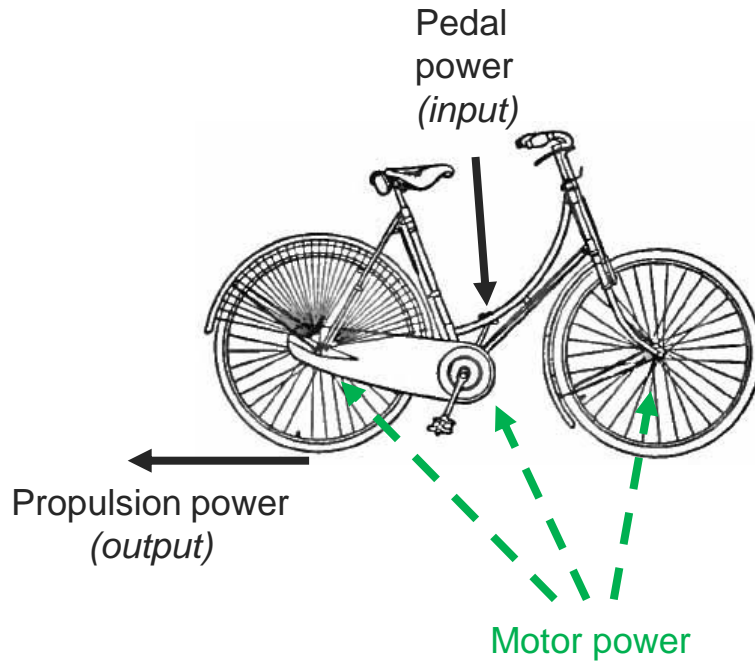


# Maximum assistance factor (MAF)

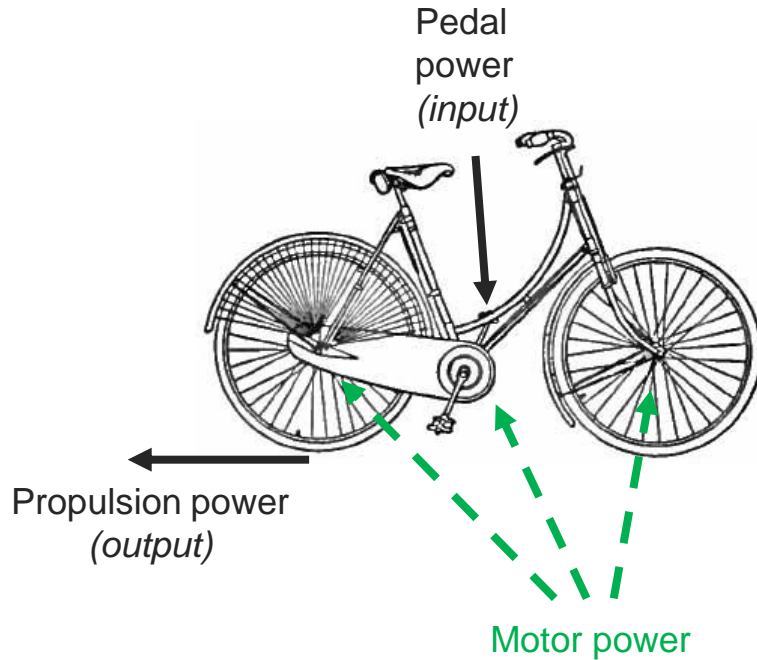

$$\text{Assistance factor} = \frac{\text{propulsion power} - \text{pedal power}}{\text{pedal power}}$$

$$\approx \frac{\text{motor power}}{\text{pedal power}}$$

# Maximum assistance factor (MAF)

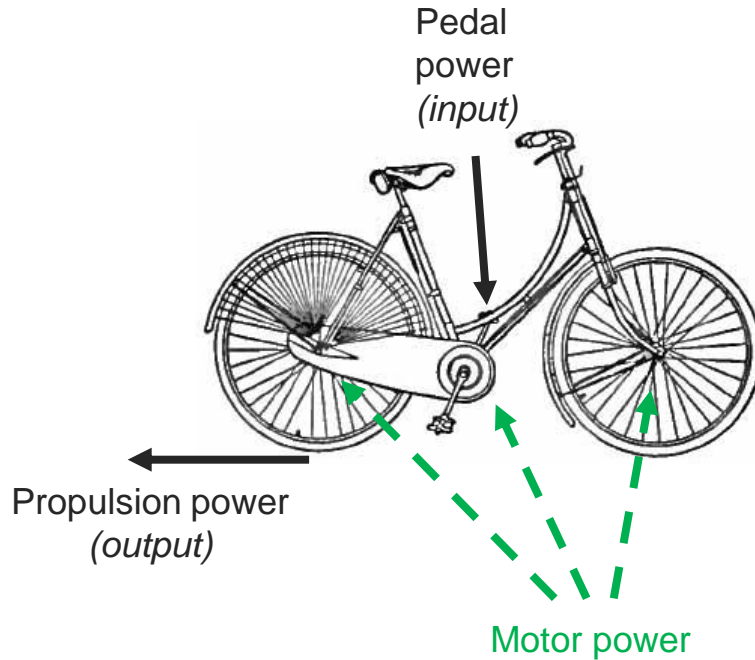

$$\text{Assistance factor} = \frac{\text{propulsion power} - \text{pedal power}}{\text{pedal power}}$$

$$\approx \frac{\text{motor power}}{\text{pedal power}}$$


Maximum assistance factor (MAF)

→ maximum measured in 3 operation points:

Point of operation	Simulated rider input power (+/- 10 %) in (W)	Target vehicle speed (°) (+/- 10 %) in (km/h)	Desired pedalling cadence (°) in (rpm)
A	80	20	60
B	120	35	70
C	160	40	80

Commission delegated regulation (EU) No 134/2014

# Propulsion power ↔ vehicle speed

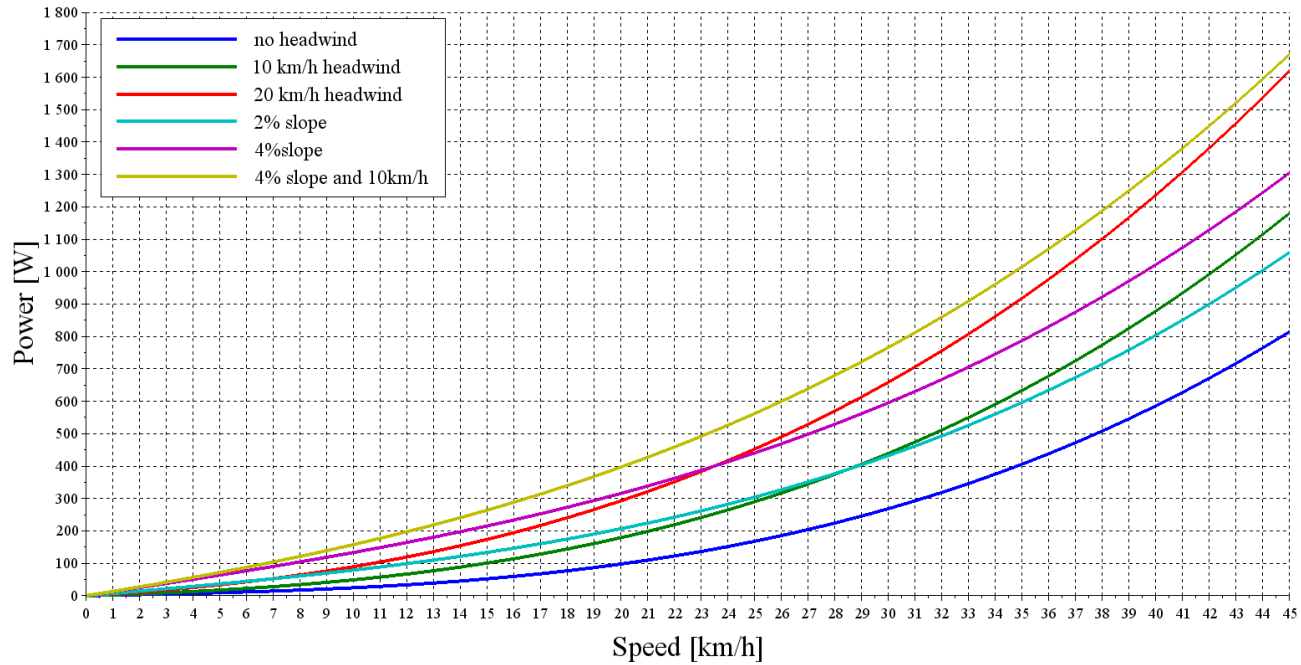

## Propulsion power ↔ vehicle speed



Pedal power	Assistance factor	No wind, no slope
100 W	4	38 km/h

# Propulsion power ↔ vehicle speed



Pedal power	Assistance factor	No wind, no slope	10 km/h headwind
100 W	4	38 km/h	32 km/h

# Propulsion power ↔ vehicle speed



Pedal power	Assistance factor	No wind, no slope	10 km/h headwind	4% slope
100 W	4	38 km/h	32 km/h	27 km/h

# Propulsion power ↔ vehicle speed




Pedal power	Assistance factor	No wind, no slope	10 km/h headwind	4% slope
100 W	4	38 km/h	32 km/h	27 km/h
150 W	4	44 km/h	37 km/h	34 km/h

# Propulsion power ↔ vehicle speed



Pedal power	Assistance factor	No wind, no slope	10 km/h headwind	4% slope
100 W	4	38 km/h	32 km/h	27 km/h
150 W	4	44 km/h	37 km/h	34 km/h
150 W	6	45 km/h	43 km/h	40 km/h

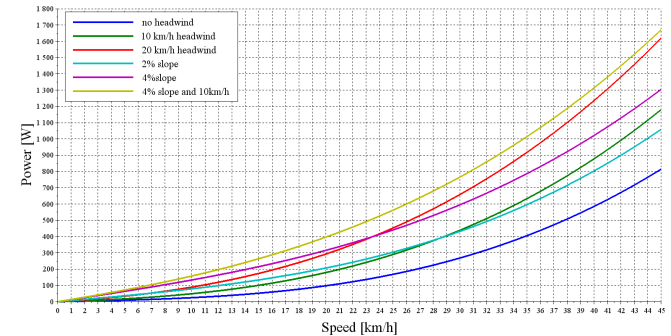

- Preliminary results of a survey among Flemish speed pedelec users indicate that punctuality is very important.
- The limitation of the maximum assistance factor makes the speed pedelec more sensitive to environmental factors.
- Only stronger riders will reach the expected maximum assistance speed of 45 km/h.

## Operation points to test the maximum assistance factor

Point of operation	Simulated rider input power (+/- 10 %) in (W)	Target vehicle speed <sup>(i)</sup> (+/- 10 %) in (km/h)	Desired pedalling cadence <sup>(ii)</sup> in (rpm)
A	80	20	60
B	120	35	70
C	160	40	80

<sup>(i)</sup> If the target vehicle speed cannot be reached, the measurement shall be performed at the maximum vehicle speed reached  
<sup>(ii)</sup> select gear closest to required rpm rate for the point of operation



Operation points to test the maximum assistance factor

Point of operation	Simulated rider input power (+/- 10 %) in (W)	Target vehicle speed <sup>(i)</sup> (+/- 10 %) in (km/h)	Desired pedalling cadence <sup>(ii)</sup> in (rpm)
A	80	20	60
B	120	35	70
C	160	40	80

<sup>(i)</sup> If the target vehicle speed cannot be reached, the measurement shall be performed at the maximum vehicle speed reached  
<sup>(ii)</sup> select gear closest to required rpm rate for the point of operation



## Operation points to test the maximum assistance factor

Point of operation	Simulated rider input power (+/- 10 %) in (W)	Target vehicle speed <sup>(i)</sup> (+/- 10 %) in (km/h)	Desired pedalling cadence <sup>(ii)</sup> in (rpm)
A	80	20	60
B	120	35	70
C	160	40	80

<sup>(i)</sup> If the target vehicle speed cannot be reached, the measurement shall be performed at the maximum vehicle speed reached  
<sup>(ii)</sup> select gear closest to required rpm rate for the point of operation



Operation points to test the maximum assistance factor

Point of operation	Simulated rider input power (+/- 10 %) in (W)	Target vehicle speed <sup>(i)</sup> (+/- 10 %) in (km/h)	Desired pedalling cadence <sup>(ii)</sup> in (rpm)
A	80	20	60
B	120	35	70
C	160	40	80

<sup>(i)</sup> If the target vehicle speed cannot be reached, the measurement shall be performed at the maximum vehicle speed reached  
<sup>(ii)</sup> select gear closest to required rpm rate for the point of operation



Operation points to test the maximum assistance factor

Point of operation	Simulated rider input power (+/- 10 %) in (W)	Target vehicle speed <sup>(i)</sup> (+/- 10 %) in (km/h)	Desired pedalling cadence <sup>(ii)</sup> in (rpm)
A	80	20	60
B	120	35	70
C	160	40	80

<sup>(i)</sup> If the target vehicle speed cannot be reached, the measurement shall be performed at the maximum vehicle speed reached  
<sup>(ii)</sup> select gear closest to required rpm rate for the point of operation




## Operation points to test the maximum assistance factor

Point of operation	Simulated rider input power (+/- 10 %) (W)	Target vehicle speed <sup>(i)</sup> (+/- 10 %) (km/h)	Desired pedalling cadence <sup>(ii)</sup> in (rpm)
A	80	20	60
B	120	35	70
C	160	40	80

<sup>(i)</sup> If the target vehicle speed cannot be reached, the measurement shall be performed at the maximum vehicle speed reached  
<sup>(ii)</sup> select gear closest to required rpm rate for the point of operation




### Operating point C

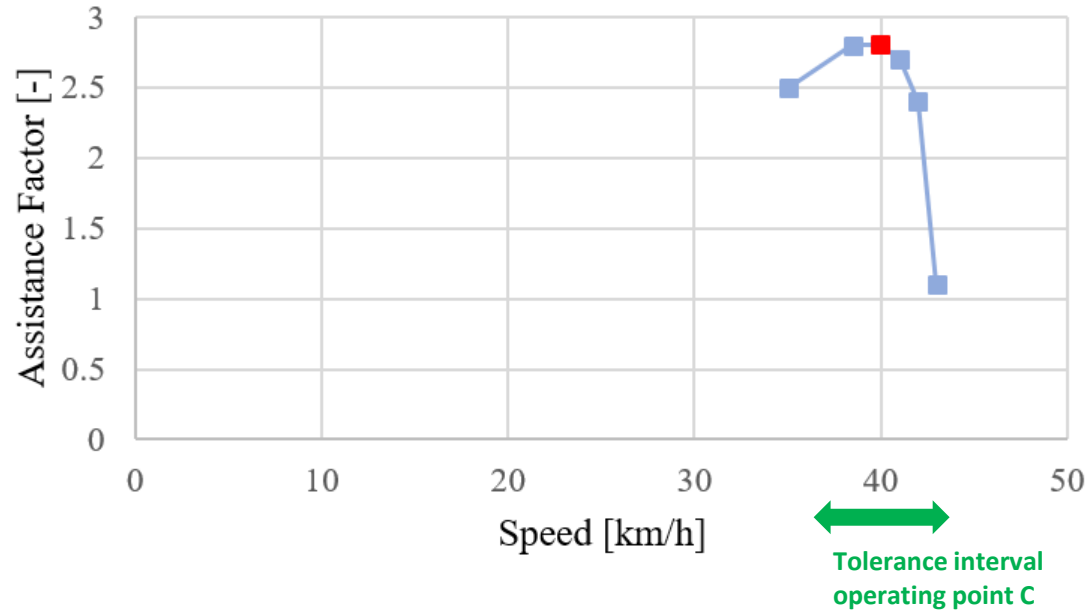


## MAF ⇔ testing procedure


Operating point A

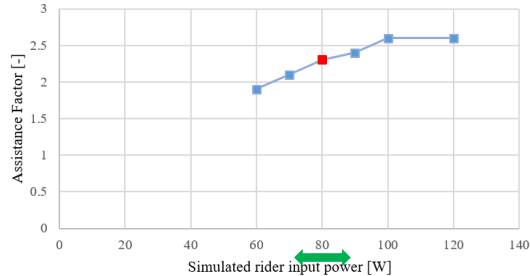

Operating point C

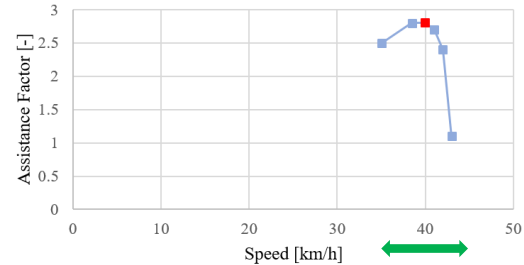


Operating point A

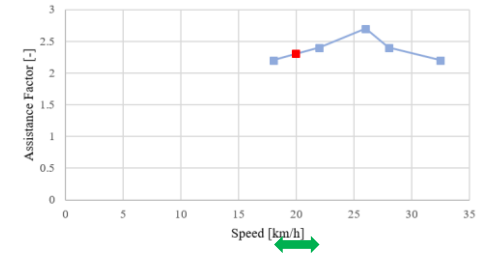


- The testing procedure only measures the maximum assistance factor in 3 predefined operating points.
- The tolerances in the official testing method allow for deliberately choosing the lowest value in a certain interval.

# MAF ⇔ current speed pedelec assistance factors

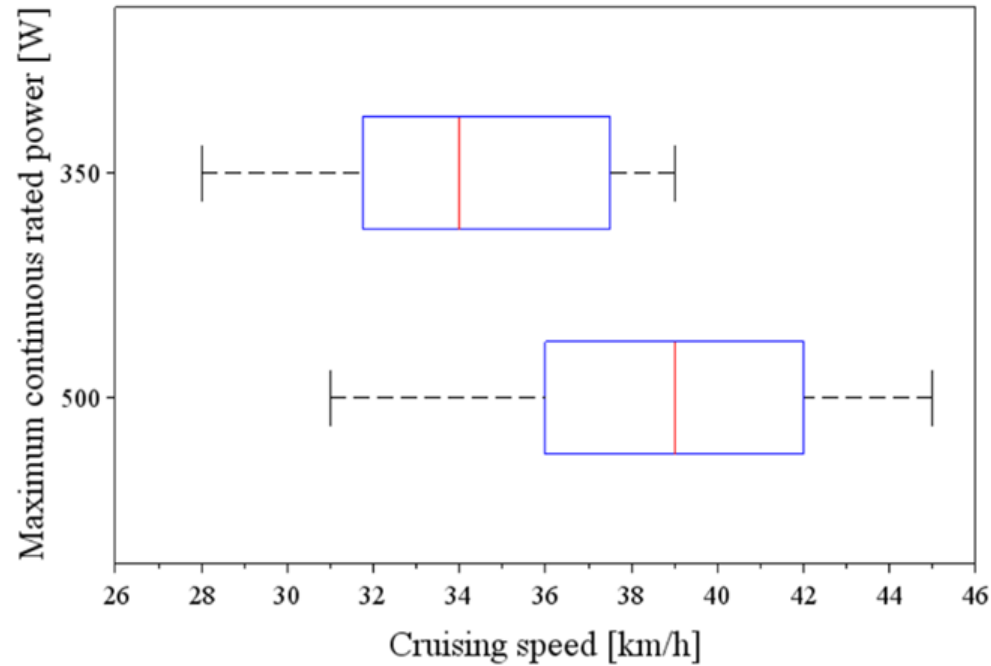

## MAF ⇔ current speed pedelec assistance factors

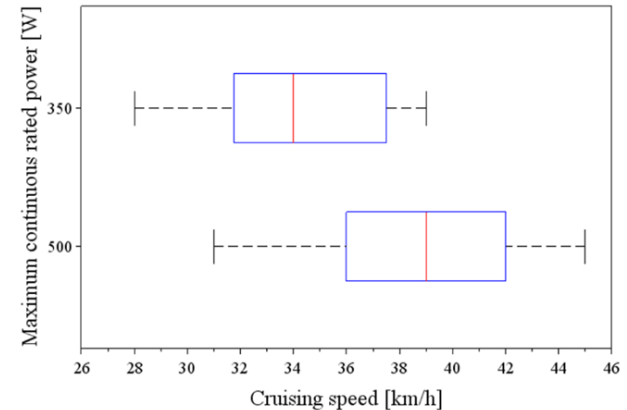

- Measurement of cruising speed of speed pedelec users suggest that cycles with assistance factors higher than four are commercially available.
- This is legally possible since there was no limitation of the maximum assistance factor for vehicles type approved in accordance with directive 2002/24/EC.

## MAF ⇔ safety?

- Why do vehicles designed to pedal need a maximum assistance factor to guarantee vehicle structure integrity?

## MAF ⇔ safety?

- Why do vehicles designed to pedal need a maximum assistance factor to guarantee vehicle structure integrity?  
→ *The assistance factor is not limited for traditional pedelecs and this does not seem to cause safety issues.*

## MAF ⇔ safety?

- Why do vehicles designed to pedal need a maximum assistance factor to guarantee vehicle structure integrity?  
 → *The assistance factor is not limited for traditional pedelecs and this does not seem to cause safety issues.*
- In previous research is mentioned that the limitation of the assistance factor is important for safe starting.

## MAF ⇔ safety?

- Why do vehicles designed to pedal need a maximum assistance factor to guarantee vehicle structure integrity?  
 → *The assistance factor is not limited for traditional pedelecs and this does not seem to cause safety issues.*
- In previous research is mentioned that the limitation of the assistance factor is important for safe starting.  
 → *The current testing procedure is not measuring the assistance factor at low speeds.*

## MAF ⇔ safety?

- Why do vehicles designed to pedal need a maximum assistance factor to guarantee vehicle structure integrity?  
 → *The assistance factor is not limited for traditional pedelecs and this does not seem to cause safety issues.*
  
- In previous research is mentioned that the limitation of the assistance factor is important for safe starting.  
 → *The current testing procedure is not measuring the assistance factor at low speeds.*
  
- Smooth control of the motor power seems to be more important.

## Speed pedelecs that do not comply with factor 4?

- Can still be type-approved as a L1e-B vehicle (if it complies with the L1e-B classification criteria), but not as a *cycle designed to pedal*.

## Speed pedelecs that do not comply with factor 4?

- Can still be type-approved as a L1e-B vehicle (if it complies with the L1e-B classification criteria), but not as a *cycle designed to pedal*.
- Thus these vehicles:
  - Do not have to comply with tests for forks and frames as stipulated in ISO 4210:2014\*
  - Are subject to electric range test<sup>§</sup>

\*Commission delegated regulation (EU) No 3/2014

§ Commission delegated regulation (EU) No 134/2014



*"The limitation to 'four' of the ratio of auxiliary propulsion power and actual pedal power for cycles designed to pedal set out in Annex XIX should be subject to further scientific research and assessment. Upon availability of scientific data and statistics on vehicles placed on the market, the ratio 'four' referred to above may be revisited in a future revision of this Regulation."\**

\* Commission delegated regulation (EU) No 3/2014

- The maximum assistance factor of four:
  - Is causing slower and more fickle speed pedelecs
  - Is discriminating weaker riders
  - The testing procedure allows for deliberately choosing a lower value in the tolerance interval
  - Speed measurements indicate that currently speed pedelecs with higher assistance factors are available (and are not causing safety issues)
  - There is no scientifically established link between the assistance factor and safety

- The maximum assistance factor of four:
  - Is causing slower and more fickle speed pedelecs
  - Is discriminating weaker riders
  - The testing procedure allows for deliberately choosing a lower value in the tolerance interval
  - Speed measurements indicate that currently speed pedelecs with higher assistance factors are available (and are not causing safety issues)
  - There is no scientifically established link between the assistance factor and safety
- Speed pedelecs with higher assistance factors can still be type approved as a L1e-B vehicle.

- The maximum assistance factor of four:
  - Is causing slower and more fickle speed pedelecs
  - Is discriminating weaker riders
  - The testing procedure allows for deliberately choosing a lower value in the tolerance interval
  - Speed measurements indicate that currently speed pedelecs with higher assistance factors are available (and are not causing safety issues)
  - There is no scientifically established link between the assistance factor and safety
- Speed pedelecs with higher assistance factors can still be type approved as a L1e-B vehicle.
- The EU Commission may revise this limitation in a future revision of the type approval legislation.

Thank you for your attention!

Questions, suggestions or remarks?